



Report No.: SZ12020125B01

BLUETOOTH RF TEST REPORT

Issued to

Xingtel Xiamen Group Co., Ltd

For

iPhone Complimate

Model Name : i-500
Trade Name : iCreation
Standard : Radio Frequency Test Suite Structure(TSS)
and Test Purposes(TP) Specification 1.2/2.0/
2.0+EDR/2.1/2.1+EDR/3.0/3.0+HS
Test date : 2012.02.23-2012.03.02



Shenzhen MORLAB Communication Technology Co., Ltd.

Tested by Xu Yao

Xu Yao

Date 2012.3.6

Approved by Wei Yanquan

Wei Yanquan

Date 2012.3.6

Review by Xiang Lihui

Xiang Lihui

Date 2012.3.6

CTIA Authorized Test Lab
LAB CODE 20081223-00

IEEE 1725

OTA

OFTA
電訊管理局



TAF
Testing Laboratory
2030

GCF Bluetooth
Official Observer of
Global Certification Forum
BQTF

FCC
Reg. No.
741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

TABLE OF CONTENTS

1. IDENTIFICATION SUMMARY	3
1.1. Test Laboratory	3
1.2. Client	4
1.3. Manufacturer	4
1.4. Implementation Under Test (IUT)	4
1.5. Testing Environment	4
2. IUT CONFORMANCE STATUS	5
3. STATIC CONFORMANCE SUMMARY	5
4. DYNAMIC CONFORMANCE SUMMARY	5
5. STATIC CONFORMANCE REVIEW REPORT	5
6. TEST RESULT LIST	5
ANNEX A. PICS	8
ANNEX B. TEST SYSTEM	9
ANNEX C. TEST SETUP	10
ANNEX D. EUT PHOTO	11

Change History		
Issue	Date	Reason for change
1.0	2012-03-06	First edition

1. IDENTIFICATION SUMMARY

1.1. Test Laboratory

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
City:	Shenzhen
Postal code:	518101
Country:	P. R. China
Telephone:	+86 755 86130268
Fax:	+86 755 86130218
URL:	www.morlab.cn
Contact person:	Mr. Shu Luan
e-mail:	shuluan@morlab.cn

Competences and guarantees:

Morlab is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, Morlab has a calibration and maintenance programme for its measuring equipment.

Morlab guarantees the reliability of the data presented in this report, which is the result of measurements and tests performed to the item under test on the date and under the conditions stated on the report and is based on the knowledge and technical facilities available at Morlab at the time of execution of the test.

Morlab is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the item under test and the results of the test.

1.2. Client

Name:	Xingtel Xiamen Group Co., Ltd
Address:	Xingtel Building,Chuangxin Road, Torch Hi-Tech Industrial District,Xiamen 361006, PR China

1.3. Manufacturer

Name:	Xingtel Xiamen Group Co., Ltd
Address:	Xingtel Building,Chuangxin Road, Torch Hi-Tech Industrial District,Xiamen 361006, PR China

1.4. Implementation Under Test (IUT)

Hw version:	V1.0
Sw version:	V1.0
Description of IUT:	The bluetooth headset with Iphone charger can connect to an iPhone with Bluetooth function, which enables you to make calls through cell phone lines
Sampling method:	Samples undergoing test have been selected by: the client

Internal Control No.:	Element:	BT_ADD:	Date Of Reception:
A01	1PCS	0015672569CF	2012.02.23

1.5. Testing Environment

PICS:	See annex A
Test Results reference:	See item 6
Retention date for log reference:	2 years
Test Requested	Bluetooth RF conformance testing

Test conditions:

NOMINAL

TEMPERATURE IN THE RANGE 15°C TO 35 °C	YES
RELATIVE HUMIDITY IN THE RANGE 20% TO 75 %	YES
AIR PRESSURE IN THE RANGE 86 kPa TO 106 kPa	YES

EXTREME

	MIN -MAX	NOMINAL
TEMPERATURE:	-10.00 to 55.00 °C	15-35 °C
VOLTAGE:	3.60 to 4.20 V.	3.80 V.

2. IUT CONFORMANCE STATUS

This IUT has the following conformance status according to the referenced ATS specification(s).

Static Conformance errors?	NO
Dynamic Conformance errors?	NO

Number of test cases run

PASSED:	55
Failed:	0
Total:	55

3. STATIC CONFORMANCE SUMMARY

The PICS(s) for this IUT is consistent with the static conformance requirements in the referenced base specification(s).

The qualified PICS/PIXIT menu of the test system was defined in accordance with the client.

4. DYNAMIC CONFORMANCE SUMMARY

The test campaign did NOT reveal errors in the IUT.

5. STATIC CONFORMANCE REVIEW REPORT

PICS CORRECT	11
PICS INCORRECT	0
PICS NOT FILLED	0

6. TEST RESULT LIST

BR-RF TEST RESULTS				
Test Case Id	Temperat.	Voltage	Observations	Verdict
TRM/CA/01/C.- Output Power	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass

	Minimum	Minimum	Temp.- Rel.Humidity.-	Pass
	Minimum	Maximum	Temp.- Rel.Humidity.-	Pass
	Maximum	Minimum	Temp.- Rel.Humidity.-	Pass
	Maximum	Maximum	Temp.- Rel.Humidity.-	Pass
TRM/CA/02/C.- Power density	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
	Minimum	Minimum	Temp.- Rel.Humidity.-	Pass
	Minimum	Maximum	Temp.- Rel.Humidity.-	Pass
	Maximum	Minimum	Temp.- Rel.Humidity.-	Pass
	Maximum	Maximum	Temp.- Rel.Humidity.-	Pass
TRM/CA/03/C.- Power Control	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
TRM/CA/04/C.- TX Output Spectrum –Frequency range	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
	Minimum	Minimum	Temp.- Rel.Humidity.-	Pass
	Minimum	Maximum	Temp.- Rel.Humidity.-	Pass
	Maximum	Minimum	Temp.- Rel.Humidity.-	Pass
	Maximum	Maximum	Temp.- Rel.Humidity.-	Pass
TRM/CA/05/C.- TX Output Spectrum - 20 dB Bandwidth	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
	Minimum	Minimum	Temp.- Rel.Humidity.-	Pass
	Minimum	Maximum	Temp.- Rel.Humidity.-	Pass
	Maximum	Minimum	Temp.- Rel.Humidity.-	Pass
	Maximum	Maximum	Temp.- Rel.Humidity.-	Pass
TRM/CA/06/C.- OutputSpectrum-Adjacent channel power	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
	Minimum	Minimum	Temp.- Rel.Humidity.-	Pass
	Minimum	Maximum	Temp.- Rel.Humidity.-	Pass
	Maximum	Minimum	Temp.- Rel.Humidity.-	Pass
	Maximum	Maximum	Temp.- Rel.Humidity.-	Pass
TRM/CA/07/C.- Modulation Characteristics	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
	Minimum	Minimum	Temp.- Rel.Humidity.-	Pass
	Minimum	Maximum	Temp.-	Pass

			Rel.Humidity.-	
	Maximum	Minimum	Temp.- Rel.Humidity.-	Pass
	Maximum	Maximum	Temp.- Rel.Humidity.-	Pass
TRM/CA/08/C.- Initial Carrier Frequency Tolerance	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
	Minimum	Minimum	Temp.- Rel.Humidity.-	Pass
	Minimum	Maximum	Temp.- Rel.Humidity.-	Pass
	Maximum	Minimum	Temp.- Rel.Humidity.-	Pass
	Maximum	Maximum	Temp.- Rel.Humidity.-	Pass
TRM/CA/09/C.- Carrier Frequency Drift	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
	Minimum	Minimum	Temp.- Rel.Humidity.-	Pass
	Minimum	Maximum	Temp.- Rel.Humidity.-	Pass
	Maximum	Minimum	Temp.- Rel.Humidity.-	Pass
	Maximum	Maximum	Temp.- Rel.Humidity.-	Pass
RCV/CA/01/C.- Sensitivity - single slot packets	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
	Minimum	Minimum	Temp.- Rel.Humidity.-	Pass
	Minimum	Maximum	Temp.- Rel.Humidity.-	Pass
	Maximum	Minimum	Temp.- Rel.Humidity.-	Pass
	Maximum	Maximum	Temp.- Rel.Humidity.-	Pass
RCV/CA/02/C.- Sensitivity - multi-slot packets	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
	Minimum	Minimum	Temp.- Rel.Humidity.-	Pass
	Minimum	Maximum	Temp.- Rel.Humidity.-	Pass
	Maximum	Minimum	Temp.- Rel.Humidity.-	Pass
	Maximum	Maximum	Temp.- Rel.Humidity.-	Pass
RCV/CA/03/C.- C/I performance	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
RCV/CA/04/C.- Blocking performance	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
RCV/CA/05/C.- Intermodulation performance	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass
RCV/CA/06/C.- Maximum input level	Nominal	Nominal	Temp.- Rel.Humidity.-	Pass

Annex A. PICS

Item	Capability	Reference	Status	Support: YES or NO
1	Power Class = 1	RF, 3	M.1	NO
2	Power Class = 2	RF, 3	M.1	YES
3	Power Class = 3	RF, 3	M.1	NO
4	Power Control	RF, 3	C.1	YES
5	1-slot packets supported	RF, 3.3	M	YES
6	3-slot packets supported	RF, 3.3	O	YES
7	5-slot packets supported	RF, 3.3	O	YES
8	79 Channels	RF, 2	M	YES
9	Support for GFSK modulation	RF, 3.1	M	YES
10	Support for pi/4-DQPSK modulation	RF, 3.2	C.2	NO
11	Support for 8DPSK modulation	RF, 3.3	C.2	NO

M.1: Must choose One and only One Power Class

C.1: Mandatory to support IF Power Class 1 is supported, ELSE Optional


C.2: Mandatory IF SUM (21/4) OR SUM (21/6) is claimed, Optional IF SUM (21/3) OR SUM (21/5) is claimed, Excluded otherwise.

C.3: Mandatory IF SUM (21/4) OR SUM (21/6) is claimed, Optional IF RF(1/8) AND (SUM (21/3) OR SUM (21/5)) are claimed. Excluded otherwise.

Annex B. TEST SYSTEM

Equipment Name	Serial No.	Type	Manufacturer	Calibrate Date
BITE T1111				
Spectrum Analyser	MY45115515	E7405A	AGILENT	2011.05
RF Signal Generator	MY45095851	E4438C	AGILENT	2011.05
Wideband Generator	MY47461226	8257D	AGILENT	2011.05
RF power meter	MY45102093	E4416A	AGILENT	2011.05
Power Sensor	MY41091238	8485D	AGILENT	2011.05
Power Sensor	MY4109553	8482A	AGILENT	2011.05
DC Power supply	MY43005311	66311B	AGILENT	2011.05
Signalling Unit	803003	MT8852B	Anritsu	2011.05
Industrial PC		TEMPEL	Advanctech	--
Switching unit	E1210000016	E1210	AT4wireless	--
Signalling unit	E1111000130	E1111	AT4wireless	2011.05
Frequency Distributor Amplifier	26	10054	Timetech	--
BR test software	--	BITE RF Tester (SW ver 1.3.11)	AT4wireless	--
EDR test software	--	Test Manager 2.0	AT4wireless	--

Annex C. TEST SETUP

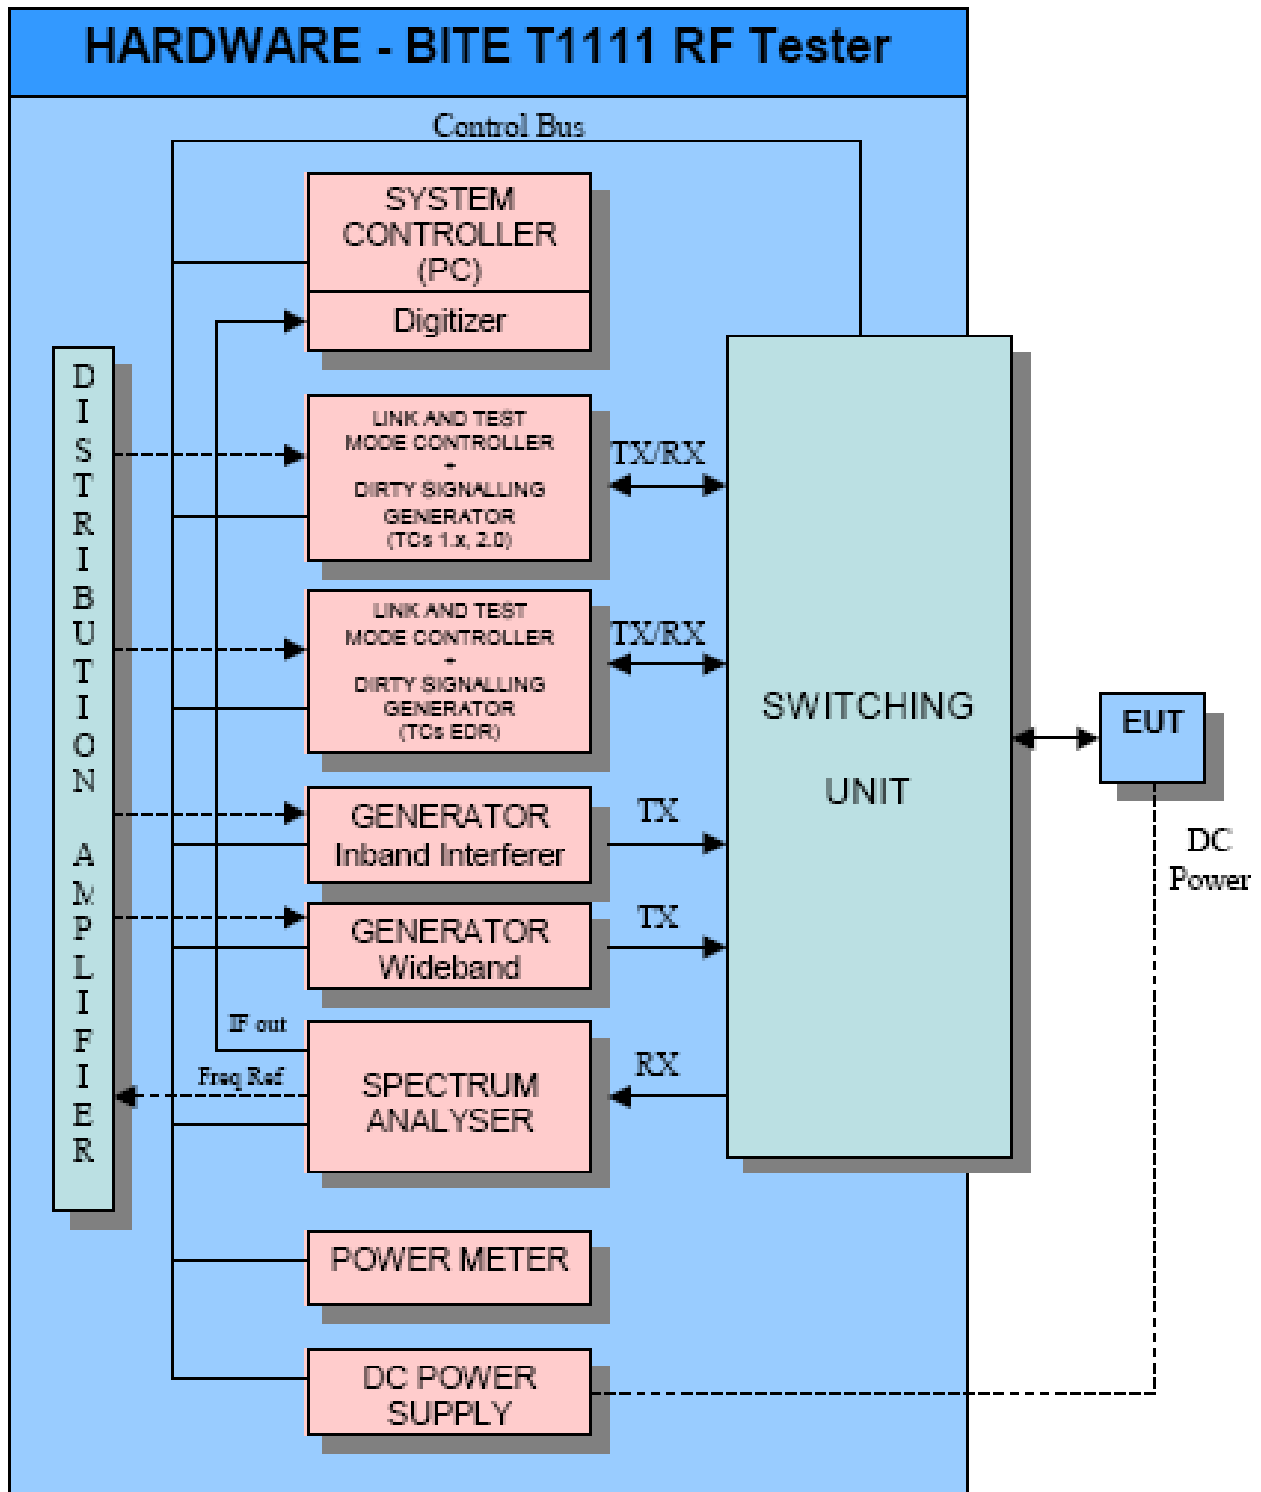

Annex D. EUT PHOTO





=====END of report=====